

Duplex Flat Indoor Cable



G652D

G657A

62.5/125

50/125

OM3

OM4


PVC

LSZH

Indoor

Fire Retardant

1 km

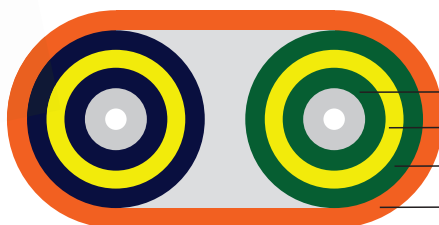

Tight-Buffered Fiber

Kevlar

Inner Jacket

Out Jacket

Optronic flat duplex fiber optic patch cable is constructed with two simplex units held together with an overall PVC/LSZH jacket. Ideal for use in office LAN connections, patchcords, pigtails and internal point-to-point links where frequent handling is likely (e.g. data cabinets, equipment rooms, user outlets). Utilising 900µm buffered fiber, the cable unit is suitable for use with industry standard connectors and can be easily made into a patchcord.

Feature

- 1.Choice of fiber types
- 2.Choice of cable outer diameters
- 3.High strength aramid yarn strength members for ease of handling
- 4.Easy stripping
- 5.PVC/LSZH jacket for use

Application

- 1.Patchcords
- 2.Pigtails
- 3.Internal inter-connections

Specification

Cable Dimension (mm)	Cable Weight (kg/km)	Tensile (N)		Crush (N/100mm)		Min.Bend Radius (mm)		Range of Temperature (°C)
		Long Term	Short Term	Long Term	Short Term	Dynamic	Static	
2.8x4.8	9.4	100	200	200	1500	100	35	-20~+60
3.0x5.0	11.3	100	200	200	1500	100	40	
4.0x7.0	18.0	160	300	200	1500	100	40	



USA
Fernando Chang
Tel: 1-714-990-4488
E-mail: fchang@fipos.com



China
Glenn Wu
Mobile: 86-13509658246
E-mail: sale@fipos.cn