
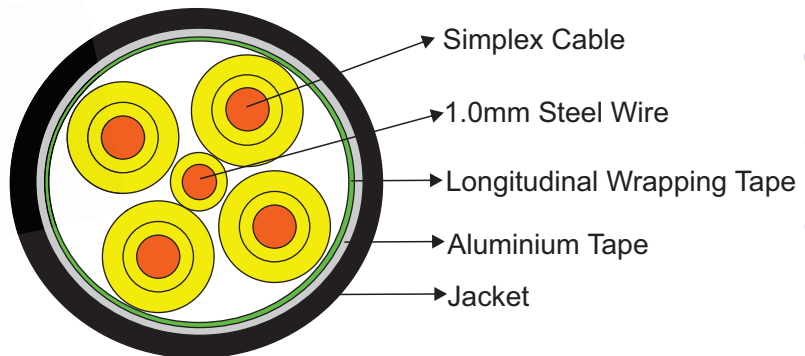


9/125

62.5/125

50/125

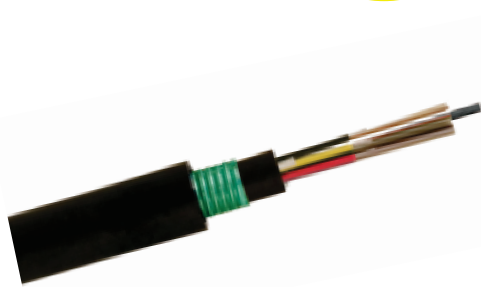

LSZH

Anti-rodent

Anti-water

Flame-retardant

Waterproof cable use simplex (inner  $\Phi 900\mu\text{m}$  tight buffer fiber, aramid yarn as strength member) as subunit. A 1.0mm steel wire locates in the center of core as a metallic strength member. The subunits are stranded around the cable core. An aluminum polyethylene laminate is applied around the cable core.

## Feature

- 1.Stranded metallic strength member structure ensure the cable endure large tensile strength
- 2.The jacket anti-rodent,anti-water, anti-ultraviolet radiation, flame-retardant
- 3.APL moisture barrier
- 4.LSZH jacket for use
- 5.Scientific design with serious processing art

## Application

- 1.Adopted to outdoor distribution
- 2.Connected to connectors of various models interconnect
- 3.Can be installed conveniently and operated simply

## Specification

Cable Count	Cable Weight (kg/km)	Tensile (N)		Crush (N/100mm)		Min.Bend Radius (mm)		Range of Temperature (°C)
		Long Term	Short Term	Long Term	Short Term	Dynamic	Static	
4	109	600	1500	300	1000	20D	10D	-40~+85
6	106	600	1500	300	1000	20D	10D	
8	125	600	1500	300	1000	20D	10D	



USA  
Fernando Chang  
Tel: 1-714-990-4488  
E-mail: fchang@fipos.com



China  
Glenn Wu  
Mobile: 86-13509658246  
E-mail: sale@fipos.cn