


# Simplex Round Indoor Cable



- PVC
- LSZH
- Indoor
- Fire Retardant
- 1 km

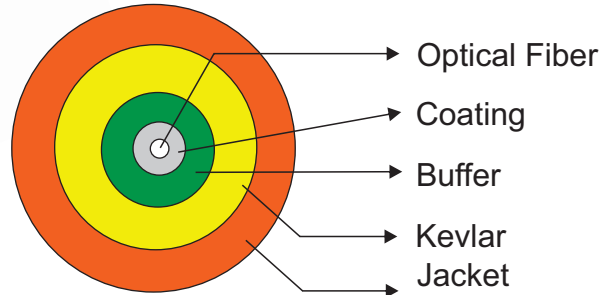

Simplex fiber optic patch cable is ideal for use in office LAN connections, patchcords, pigtails and internal point-to-point links where frequent handling is likely (e.g. data cabinets, equipment rooms, user outlets). Utilising 600µm or 900µm buffered fiber, the cable is suitable for use with industry standard connectors and can be easily made into a patchcord.

## Feature

1. Choice of fiber types
2. Choice of cable outer diameters
3. High strength aramid yarn strength members for ease of handling
4. Robust 600µm or 900µm tight buffered fibers for ease of termination
5. Easy stripping
6. PVC/LSZH jacket for use

## Application

1. Patchcords
2. Pigtails
3. Internal inter-connections

## Specification

Cable Dimension (mm)	Cable Weight (kg/km)	Tensile (N)		Crush (N/100mm)		Min. Bend Radius (mm)		Range of Temperature (°C)
		Long Term	Short Term	Long Term	Short Term	Dynamic	Static	
1.6	2.0	30	60	-	-	50	30	-20~+60
1.8	2.8	40	80	-	-	50	30	
2.0	3.5	60	100	100	500	50	30	
2.4	4.5	60	100	100	500	50	30	
2.8	5.8	80	150	100	500	60	30	
3.0	6.5	80	150	100	500	60	30	



USA  
Fernando Chang  
Tel: 1-714-990-4488  
E-mail: fchang@fipos.com



China  
Glenn Wu  
Mobile: 86-13509658246  
E-mail: sale@fipos.cn